

Color:

## Features

1. This system could play various media files smoothly with supports of multiple animation and video format hard decoding.
2. Various expressions and vivid contents with powerful visual impact.
3. To get better picture quality than display screen with less cost.
4. Low-power consumption with timing control: Energy saving with less light pollution.
5. Significant increase lifespan of LED through low voltage and low current with ultra-low temperature operation.
6. The distance of the panel is 2.5-3cm away from the fabric which is suitable for lightbox with a thickness of 6cm or more.
7. Highly modular, easy to install and maintain.

## Application

Lightbox

## Installation

Magnetic method / Aluminum profile + clip.



## Specification

Model No.	Light Color	LED Type	Luminous Flux (Lm/piece)	Voltage(V DC)	Max. Current (A/piece)	Max.Power (W/piece)
NW130-B-P6.5-A1	White	2835	1100	5	2.6	13
NW260-B-P6.5-A1			2000		5.2	26

## Other Parameters

Model No.	Product Size (mm)	LED-to-Canvas Distance(mm)	Pixel(W*H)	Max Run (pcs)	Working Temperature	Storage Temperature
NW130-B-P6.5-A1	208X208	15-20	32X32	3	-25~+60°C	-25~+70°C
NW260-B-P6.5-A1	208X208	20-25	32X32	2		

### NOTE:


1. Test environment temperature : 25±2°C.
2. The above data is typical values. The actual data of each single product may differ from the typical values. The data is subject to change without notice.
3. The above data are tested with RGB three lights on.
4. Power tolerance within 10%.

## Profile Drawings


Model No.	L*W(mm)	L1*W1(mm)	L2*W2(mm)	L3*W3(mm)	P(mm)	∅(mm)	Holes Qty(mm)
NW130-B-P6.5-A1	208X208	195X195	--	--	6.5	3.2	4
NW260-B-P6.5-A1							



NW130-B-P6.5-A1、NW260-B-P6.5-A1

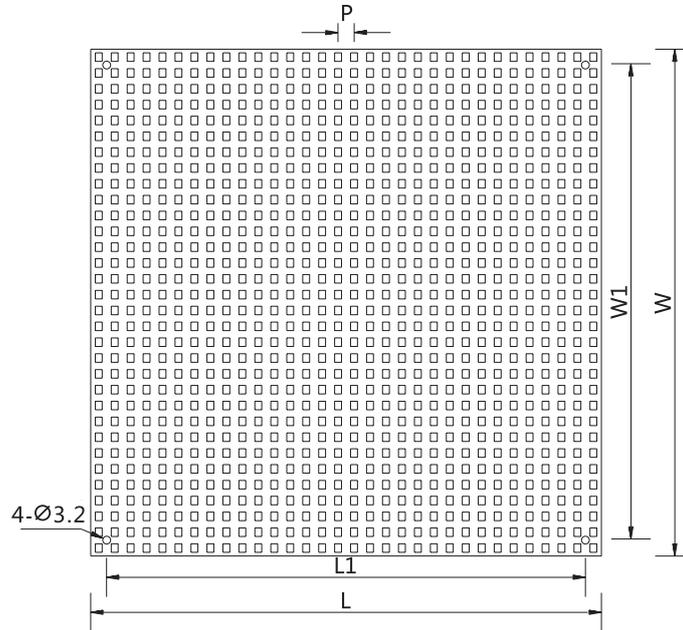

packing

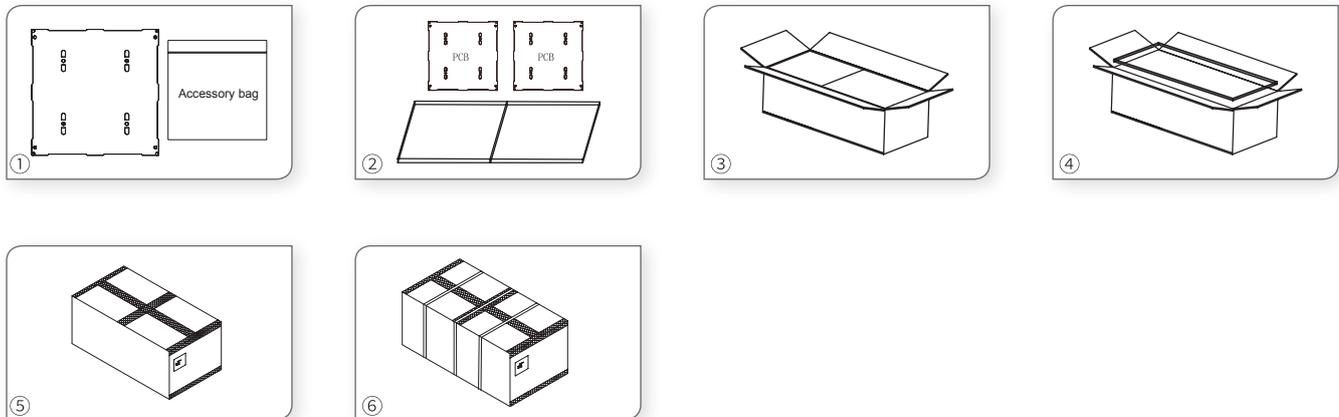

- ① Place the products and accessory bags neatly on the work table.
- ② Put PCB into the EPE bag with LEDs down, and one PCB for one EPE bag.
- ③ Overlap EPE bags layer by layer and put them together with corresponding accessories into carton box. The packing quantity refer to production task list.
- ④ Put a EPE pad on the top before sealing.
- ⑤ Seal and label the box.
- ⑥ Use packing belt to pack and add edge protectors.



---

**Packaging information**

Model No.	Product Size L*W(mm)	Carton Size(mm)	Total Qty(pcs)	Net Weight(kg)	Gross Weight(kg)
NW130-B-P6.5-A1	208X208	390X390X325	22	3.59(1±10%)	4.82(1±10%)
NW260-B-P6.5-A1					

**NOTE:**

1. The product is wrapped with the special foam plank with outer packaged by carton box;
2. Shipping Dimension: 390X390X325.
3. The above quantity and weight are only for the illustrated packaging method. There will be differences in the quantity and weight with other packaging methods.