

030M3-468 Double sides Ring light is built by Alu. extrusion fixture with Silicone lens. It's creating smooth and comfort lighting. The light sourced are Osram LED in 80+ or 90+ Ra available. Color temperature options from 2700K to 6500K, Dual white, Dim2Warm at WW+NW aviable. Variouse dimmable functional.

- ▶ Double Sided lighting.
- ▶ Aluminum extruded and bend fixture for good heat dissipation.
- ▶ Flexiable Matt Silicone Lens Spot-less.
- ▶ Designed and engineered with the architectural specifier in mind

**RANGE OF APPLICATIONS**

General or local lighting in Resting Zoon, Reception, Club, Retail Restaurants, Residential, etc.

**ELECTRIC GEAR**

Constant voltage 0-10V / DALI / DMX / Non-dim dirvers, SAMSUNG or OSRAM SMD LED.

2700K	3500K	4000K	Setable White Available 1800K+6500K
-------	-------	-------	--



Constant Voltage Light Source, variouse options please check our Light Strip catalog.

	Input Vol.	Power/pc	Lumen/pc	Dimming	Dimension (D)
030M3-468	90-265 VAC	92W	5640 lm	DMX / Non-Dim	Φ450mm + Φ600mm + Φ800mm
030M3-81012	90-265 VAC	142W	9656 lm	DMX / Non-Dim	Φ800mm + Φ1000mm + Φ1200mm
030-4	90-265 VAC	25W	1530 lm	DMX / Non-Dim	Φ450mm
030-6	90-265 VAC	35W	2330 lm	DMX / Non-Dim	Φ600mm
030-8	90-265 VAC	40W	2500 lm	DMX / Non-Dim	Φ800mm
030-10	90-265 VAC	50W	3423 lm	DMX / Non-Dim	Φ1000mm
030-12	90-265 VAC	60W	4022 lm	DMX / Non-Dim	Φ1200mm



\* Customize diameter available.

Note: The given data are typical values Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.  
-15% luminous flux at Traic driver, DALI and 0/1-10V driver, and -10% Non-Dim driver.

**MULTIPLE SET**




**DIMENSION**

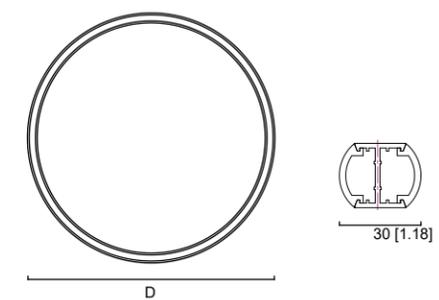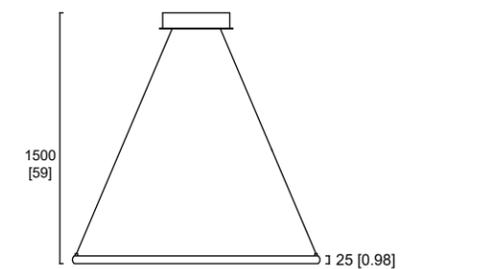

Unit: mm [inch]

FOR: SUSPENSION LIGHT

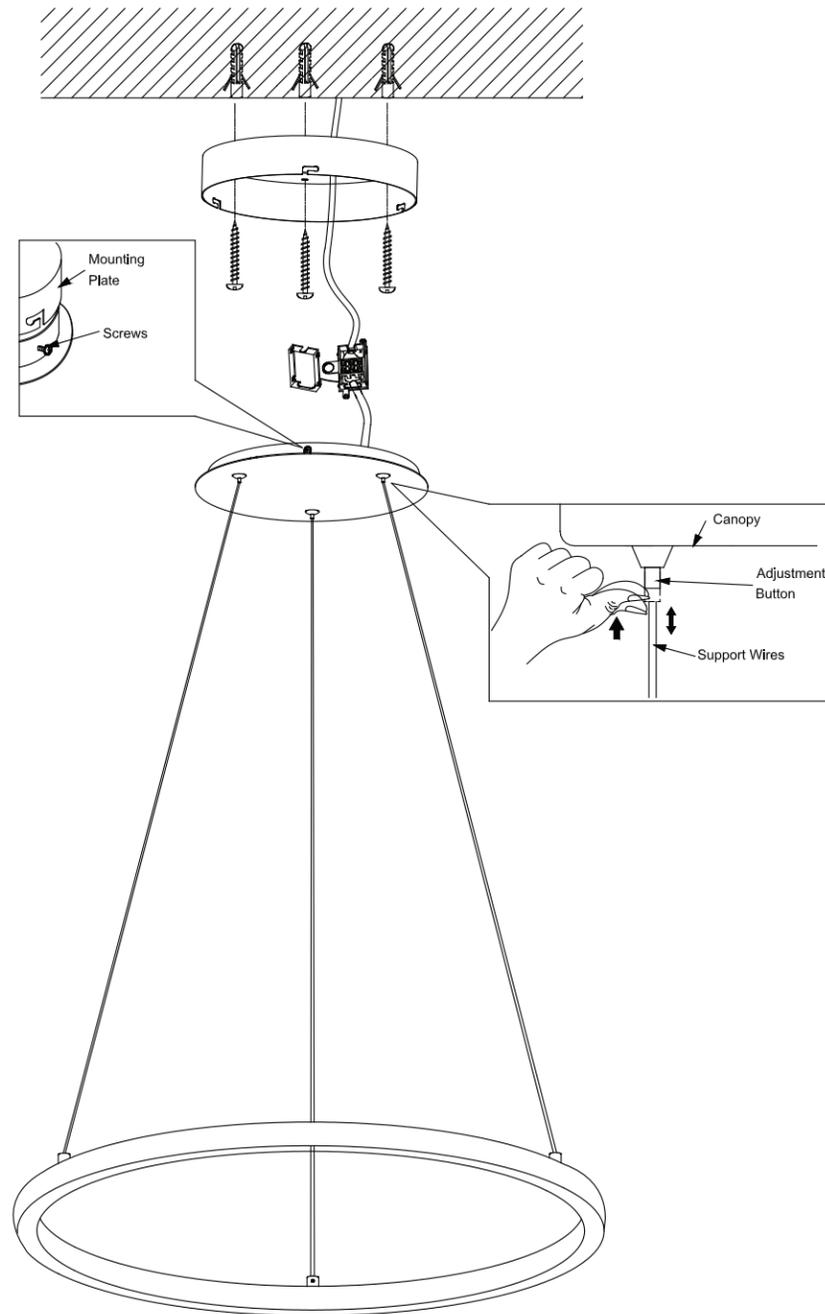

- 1 Fix the base plate to the ceiling by Root screws and Philips screws
- 2 Wiring the AC cables to the lamp
- 3 Fix the canopy to the base plate, and tighten it with screws by Philip screw driver.
- 4 Adjust the pendant cable to the satisfied height by drawing shows.

INSTRUCTIONS FOR INSTALLATION AND USE

**WARNING:** The security of this equipment is guaranteed only with compliance of these instructions, so you must keep them. Installation and all non-routine maintenance must be carried out only by qualified personal.

Disconnect power before taking any action on the fitting.

Blueview is not responsible for any damage to persons and/or property resulting from improper installation, misuse, or unauthorized modifications made to their products.

Obtain the correct power supply unit (accessory not included), install it in a remote location and prepare the cables for their connection

Connect to the power supply (PAYING ATTENTION TO OBSERVE POLARITY, parallel connection)

Explanation of the symbols on the label.

Due to a program of continuous improvement information is subject to change without notice.  
 © Blueview 2019 – All rights reserved.  
 Made in China.

BLUEVIEW ELEC-OPTIC TECH CO.,LTD  
 Tel: +86-28-8148 0011 Fax: +86-28-8148 1258  
 Mail: sales@blueviewled.com  
 Web.: www.blueviewled.com  
 Add: No.1000, Konggang 2nd Konggang Road, Southwest Aviation Industrial Zone, Chengdu, China. 610207